



Dave Whites

SitePro[™]

TRIPOD FLOOR GUIDE

RUBBER BAND

O-RING

REPLACEMENT KIT

Set of 3 replacement rubber band o-rings for #01-TFG2




Replacing Rubber Band O-Ring

Using an Allen wrench, loosen both hex head fastener. Then, remove one of the fasteners and rotate the u-bracket.

Position the new rubber band o-ring under the u-bracket. Rotate the u-bracket to re-align threaded hole.

Replace the hex head fastener and secure. Firmly hand tighten both hex head screws.

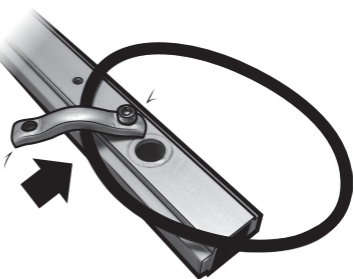

©2020 Dave White's SitePro LLC
Lafayette, IN USA

www.dwsitepro.com